




F6 FINDMY KEY FINDER

Never lose your stuff

Datasheet

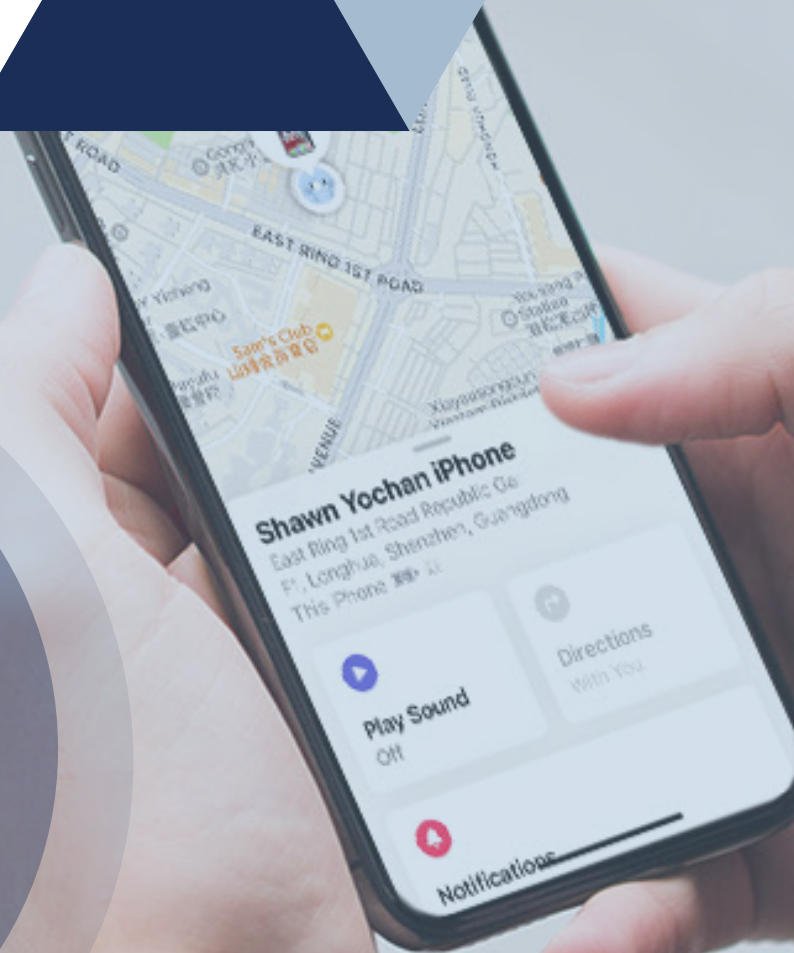

PRODUCT OVERVIEW

F6 FindMy Key Finder, supporting Bluetooth® LE 5.0, is mainly designed for working with the Find My Network of Apple. Find My Network provides a simple and secure positioning way of items. F6 can be pair with the "Find My" application of iPhone, iPad, iPod touch, Mac, etc. Users can see where are their items at a real-time on the Find My map of the apple devices. Besides, user also can realize applications, such as sound reminding, lost mode setting and location sharing.



KEY FEATURES



Working with
Apple Find My



Items Location &
Privacy Protection



Unwanted
Tracking Detection




Lost Mode & Notify
When Left Behind



Portable Design &
Personal Customization

APPLICATION SCENARIOS

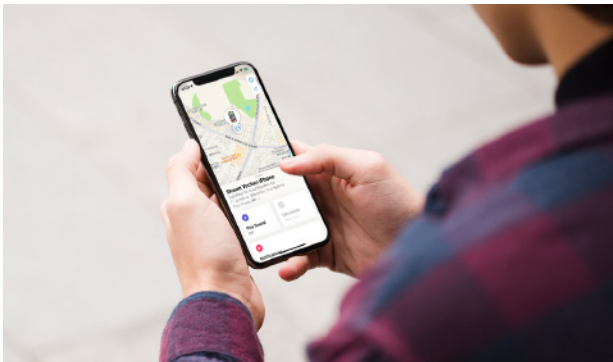

PRODUCT SPECIFICATIONS

BASIC SPECIFICATIONS

Material	ABS
Color	White (by default)
Dimensions (L * W * H)	45 * 45 * 6.5 mm
Weight	20 g
Resistant level	/
Battery	1 CR battery, 220 mAh
Battery life	1.5 years (by default)
Button	Yes
LED	Red & Blue
NFC	Not supported
Buzzer	90 dB

TECHNICAL SPECIFICATIONS

Chip	nRF52 Series
Bluetooth version	Bluetooth® LE 5.0
Broadcast power	4 dBm (default)
Broadcast distance	50 m (open area)
Connect distance	30 m (open area)
Firmware version	Find My Network Firmware
Default application	Find My 
Working temperature	-20 °C ~ 60 °C

COMPATIBILITIES

SUPPORTED SYSTEMS


iOS 14.3 and above

SUPPORTED MODELS

iPhone,iPad,iPod touch,Mac,etc.

* **Note:** To locate items using Apple's "Find My" application, the latest version of iOS, iPadOS or macOS is recommended. The "Find My" application on Apple Watch requires the latest version of watchOS.

F6 SMART FINDER WORKING PRINCIPLE

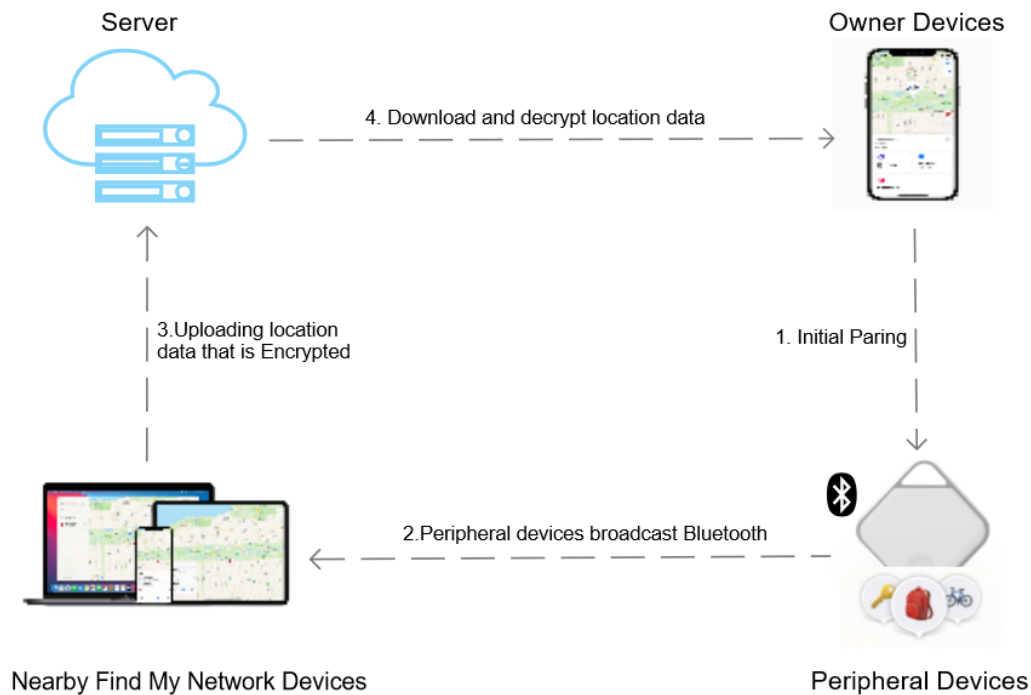

- The owners' "Find My" App will be paring with a Find My peripheral device, and generates a authentication secret key between them.
- The Find My peripheral device continuously broadcasts the device's secret key via Bluetooth.
- The nearby Apple devices (iPad, iPhone, etc.) with Bluetooth and Find My network enabled will detect the peripheral devices' Bluetooth broadcast, package the secret key with their own location data and upload it to Apple's server.
- The owners' "Find My" App downloads the corresponding content package from the server, parses and compares the secret key, and displays the relevant location data.

* **Note:** The data stored in Apple servers is end-to end encrypted, and Apple does not have access to any location information.

BASIC OPERATION

 **Power on:** The product will be turned off by default when shipping. Hold the button for 3 seconds until the blue light on , which means that it has been powered on.

 **Power off:** Hold the button for 3 seconds until the blue light flashes 5 times, which means that it has been powered off.

 **Factory Setting:** Press sequentially the devices' button 5 times until you hear a beep.

Disable the Find My Network

- Press the devices' button until the blue light flashes 5 times to turn the devices off and disable the Find My.
Or
- Open the case from the devices'top, and remove the battery to disable the Find My.

* **Note:** please contact our sales team or technical team for more detail of device' paring, location, lost mode functions or get more information on the user manual.

CERTIFICATIONS



* **Note:** CE, FCC and WEEE certification numbers can be provided upon request. If other certifications are needed, please contact our sales team.

PRECAUTIONS

- The use time and broadcast distance fluctuate due to the environment, and the specific time is subject to the actual use.
- Do not use the product above designed working temperature, such as heat source, exposed ignition source or too low temperature environment, otherwise it may cause damage, fire or explosion.
- It is recommended that to store the product in a normal temperature environment when not in use.
- This product contains batteries and other parts. Keep this product and its accessories out of the reach of children to prevent them from damaging the device, swallowing small parts or batteries that could lead to room breathing or other hazards.
- Please avoid rain or moisture on the device and its accessories, as this may lead to fire or electric shock hazards.
- Do not drop, squeeze or puncture the battery to avoid subjecting it to large external pressure, which could cause internal short circuit and overheating, resulting in battery leakage, fire or explosion. If the battery leaks, do not let your skin or eyes come in contact with the leaking liquid. If it comes in contact with skin or eyes, please rinse with water immediately and go to hospital for medical treatment.
- Please observe local ordinances for the disposal of this equipment and its accessories and support recycling actions. Do not dispose of the battery as household waste. Improper disposal of the battery may cause it to explode.
- Minew will not be responsible for any damage resulting from disassembling manually.

PACKAGING

Items	Boutique Packaging	Industrial Packaging
Picture		
Quantity	1 pc	65 pcs

QUALITY ASSURANCE

The factory has already obtained the certification of ISO9001 Quality System. Each product has been strictly tested (tests include transmission power, sensitivity, power consumption, stability, aging, etc.).

Warranty Period: 12 months from the date of shipping (Battery and other accessories excluded).

DECLARATION

Statement of Rights:

The contents of this manual belong to the Manufacturer of Minew Technologies Co., LTD, Shenzhen, and are protected by Chinese laws and applicable international conventions related to copyright laws. The contents can be revised by the company according to the technological development without prior notice. Anyone, companies, or organizations cannot modify the contents and cite the contents of this manual without Minew's permission, otherwise, Violators will be held accountable according to law.

Disclaimer:

Minew team reserves the right to the final explanation of the document and product differences. The Minew group is not responsible for liability of property or personal injury with the wrong operation if users develop related products without checking the technical specifications of this manual.

LEGAL NOTICE

Use of the Works with Apple badge means that a product has been designed to work specifically with the technology identified in the badge and has been certified by the product manufacturer to meet Apple Find My network product specifications and requirements. Apple is not responsible for the operation of this device or use of this product or its compliance with safety and regulatory standards.

CREDIT LINES

Apple, Apple Watch, iPad, iPadOS, iPod touch, Mac, and macOS are trademarks of Apple Inc., registered in the U.S. and other countries. iOS is a trademark or registered trademark of Cisco in the U.S. and other 100 countries and is used under license.



SHENZHEN MINEW TECHNOLOGIES CO., LTD.



www.minew.com



info@minew.com



www.minewstore.com